


ENGEX^{LP}

Quality Stainless Steel
Process Engineering



BAG FILTER SYSTEMS

Single bag, 8" (203.2mm) filter housings fabricated in compliance with ASME VIII Div 2. Built in 304 or 316 stainless steel for high corrosion resistance. Sanitary, lightweight and heavy duty design with top entry, easy-open triclover lid.

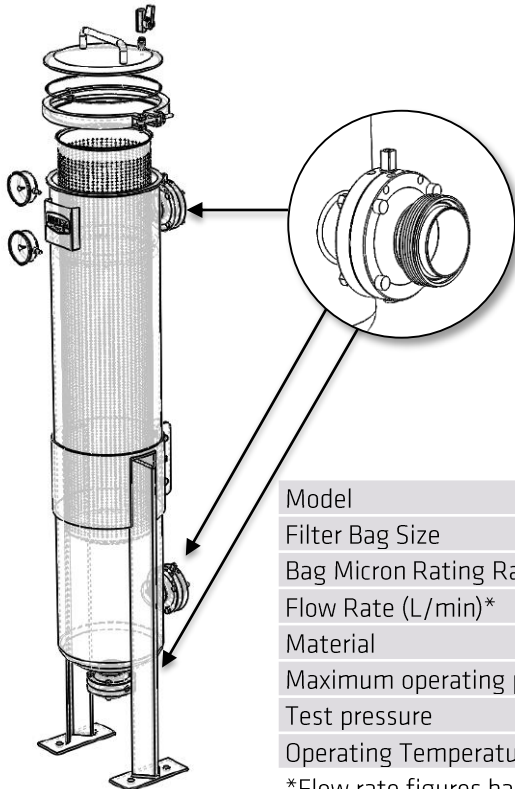

FEATURES

- 2 pressure gauges
- ¼" vent on lid
- 316 stainless steel retainer basket
- Connections: RJT, BSP, BSM, DIN, SMS, triclover, flange or valve
- Bipedal support frame

OPTIONS

- Butterfly valves on ports
- Ball valves on ports
- Pressure sensors
- Pressure relief valve
- Any inlet or outlet orientation
- Side inlet piping connections
- Bead blast external finish

Model	600 Series		1000 Series	
Filter Bag Size	#1 (178mm x 407mm)		#2 (178mm x 813mm)	
Bag Micron Rating Range	$5 \leq \mu < 150$	$150 \leq \mu < 800$	$5 \leq \mu < 150$	$150 \leq \mu < 800$
Flow Rate (L/min)*	210	260	450	570
Material	304 or 316		304 or 316	
Maximum operating pressure	1000 kPa		1000 kPa	
Test pressure	1500 kPa		1500 kPa	
Operating Temperature	130°C		130°C	

*Flow rate figures based on water flow with clean pressure drop not exceeding 15 kPa

Creative process engineers | Original equipment manufacturers

8a Trugood Drive, East Tamaki, Auckland 2013 | PO Box 58844 Botany, Manukau 2163 | P 09 274 0049 | www.engex.nz